





JT 160 SW




ALTEZZA MASSIMA CON ANCORAGGI MT. 200
MT. 200 POSSIBLE MAX HEIGHT WITH ANCHORAGE FRAME

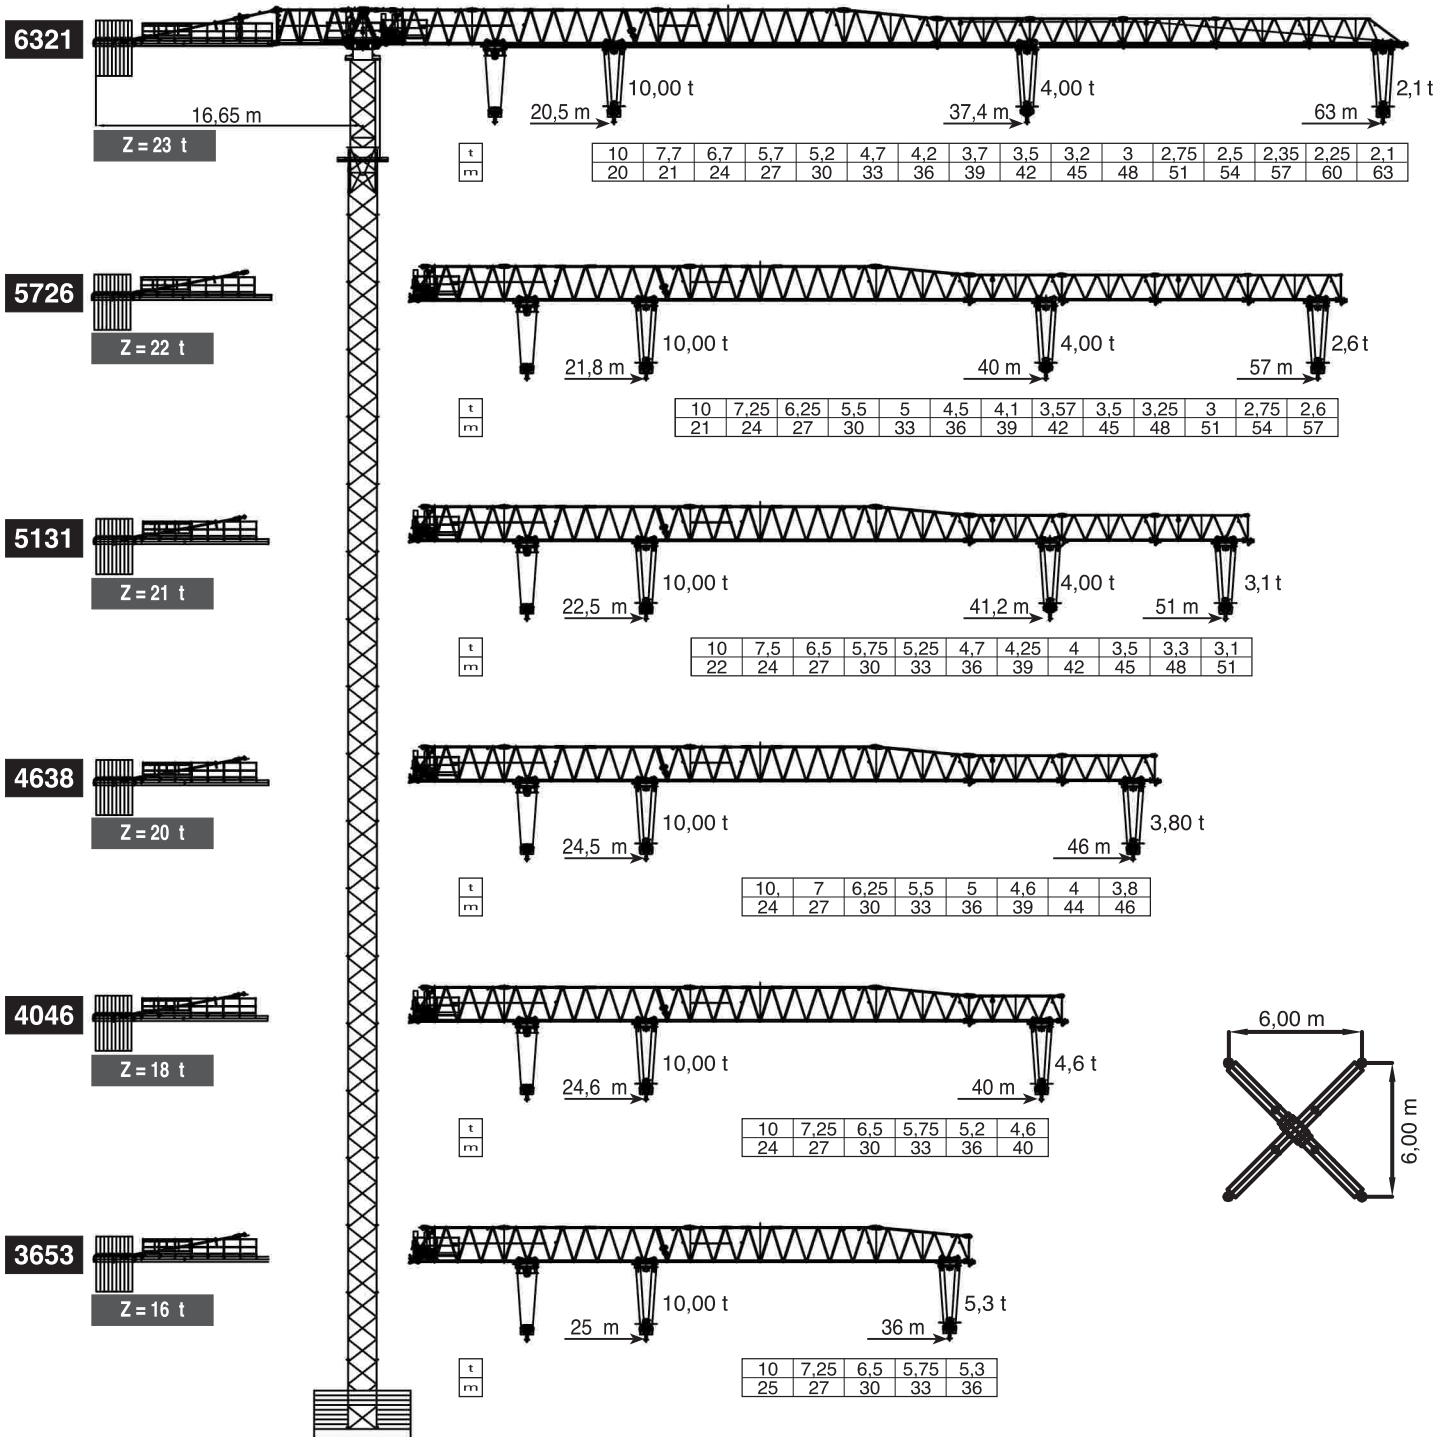


TORRI - MASTS

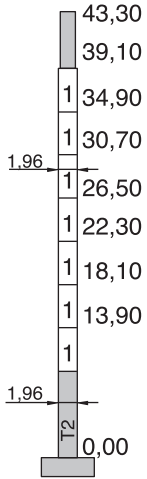


(A)

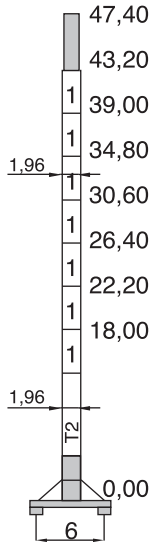


(B)

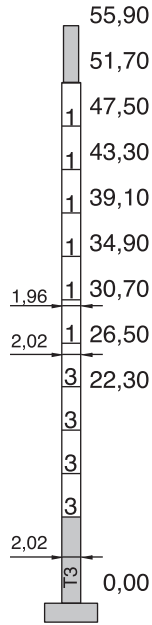


(C)

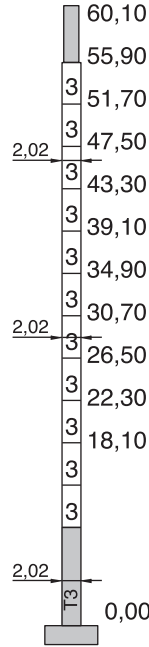

(D)

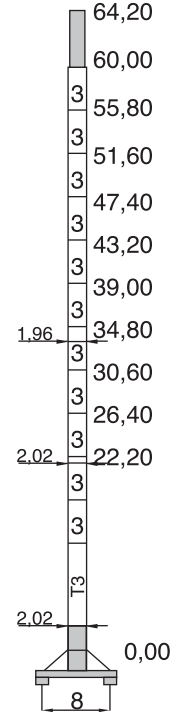

(G)

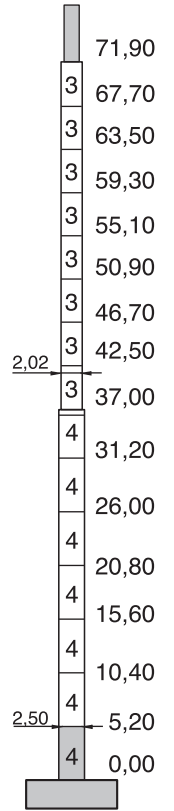

(H)


ARGANI DI SOLLEVAMENTO - HOISTING WINCHES

ARGANI DI SOLLEVAMENTO - HOISTING WINCHES											
Hp	m/1'	Kg	Kg	Hp	m/1'	Kg	Kg	Hp	m/1'	Kg	Kg
40	66/33	2000	4000	50	72/36	2250	4500	50	94/47	2500	5000
	45/22	3000	6000		48/24	3500	7000		66/33	3500	7000
	30/15	4000	8000		35/17	4000	8000		43/22	4000	8000
	25/12	4000	8000		25/12	4000	8000		28/14	4000	8000
	5/2,5	4000	8000		5/2,5	4000	8000		5/2,5	4000	8000

SENZA CARICO LA VELOCITÀ DI SOLLEVAMENTO AUMENTA DEL 20%
HOISTING SPEED INCREASE MORE THAN 20% WITHOUT LOAD

380/440V	ARGANO	POTENZA MAX	GRUPPO GEN.
50/60 HZ	WINCH	MAIN SUPPLY	GENER.
	40 HP	50 KVA	85 KVA
	50 HP	65 KVA	100 KVA
	70 HP	95 KVA	1020 KVA

VERSIONE CON TORRE MONOLITICA
MONOLITIC TOWER VERSION

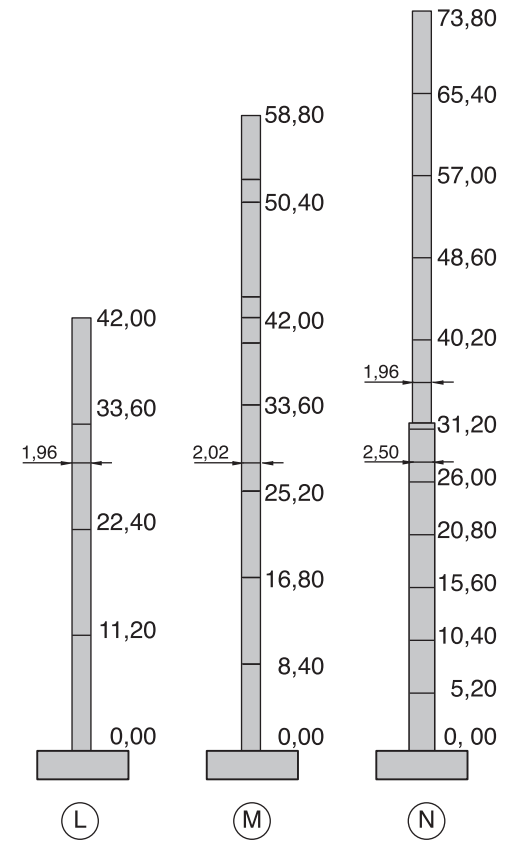

(L) (M) (N)

	4 KW	10/25/50 m/1'	R56
	2x65 Nm	0-0,8 rpm m/1'	ROT. F.

1	—	1,96 x 1,96 mt
3	—	2,02 x 2,02 mt
4	—	2,50 x 2,50 mt