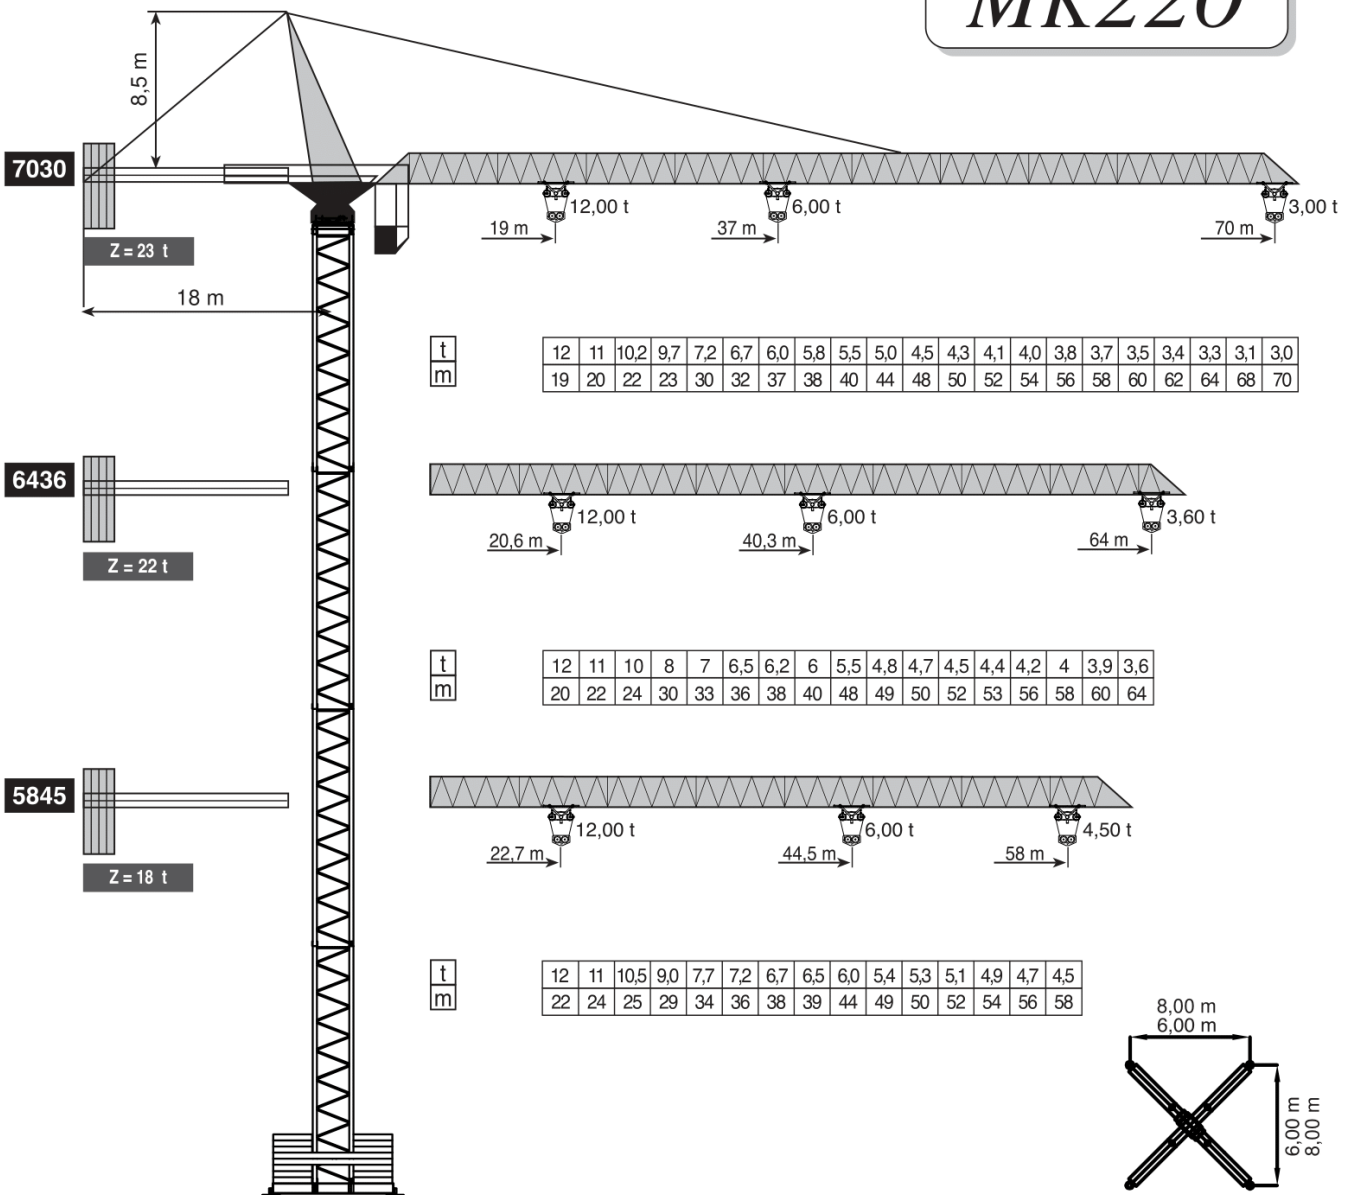




МК220





















ALTEZZA MASSIMA CON ANCORAGGI MT. 200
MT. 200 POSSIBLE MAX HEIGHT WITH ANCHORAGE FRAME

заказать:


+7 (495) 925-97-64

DISTINTA COMPONENTI GRU - STRUCTURAL CRANE PARTS

DENOMINAZIONE DENOMINATION	SCHEMA/SKETCH	A (m)	B (m)	C (m)	PESO/WEIGHT (kg)
ELEMENTO BRACCIO BR39 <i>JIB ELEMENT BR39</i>		11,75	1,96	1,50	2370
ELEMENTO BRACCIO BR40 <i>JIB ELEMENT BR40</i>		11,75	1,96	1,50	2189
ELEMENTO BRACCIO BR41 <i>JIB ELEMENT BR41</i>		5,90	1,96	1,50	980
ELEMENTO BRACCIO BR42 <i>JIB ELEMENT BR42</i>		5,90	1,96	1,50	880
ELEMENTO BRACCIO BR43 <i>JIB ELEMENT BR43</i>		11,75	1,96	1,50	1800
ELEMENTO BRACCIO BR44 <i>JIB ELEMENT BR44</i>		5,90	1,96	1,50	760
ELEMENTO BRACCIO BR45 <i>JIB ELEMENT BR45</i>		5,90	1,96	1,50	560
ELEMENTO BRACCIO BR46 <i>JIB ELEMENT BR46</i>		5,90	1,96	1,50	480
ELEMENTO BRACCIO BR47 <i>JIB ELEMENT BR47</i>		5,90	1,96	1,50	340
GRUPPO ROTAZIONE <i>SLEWING GROUP</i>		3,90	2,90	2,30	7500
CUSPIDE <i>SPIRE</i>		8,60	1,60	1,60	2690
CONTROFRECCIA PARTE LUNGA <i>COUNTERJIB LONG SIDE</i>		11,30	0,50	1,60	2360
CONTROFRECCIA PARTE CORTA <i>COUNTERJIB SHORT SIDE</i>		5,35	0,50	1,60	1080
TELAIO BASE T2 <i>BASE ELEMENT T2</i>		8,59	2,04	2,04	3480
TELAIO INTERMEDIO <i>INTERMEDIATE ELEMENT</i>		4,42	2,04	2,04	2100
TELAIO INTERNO <i>INNER ELEMENT</i>		8,45	1,75	1,75	4240
TELAIO INTERMEDIO T3 <i>INTERMEDIATE ELEMENT T3</i>		5,40	2,70	2,70	2900
TELAIO BASE T3 <i>BASE ELEMENT T3</i>		5,40	2,70	2,70	2900



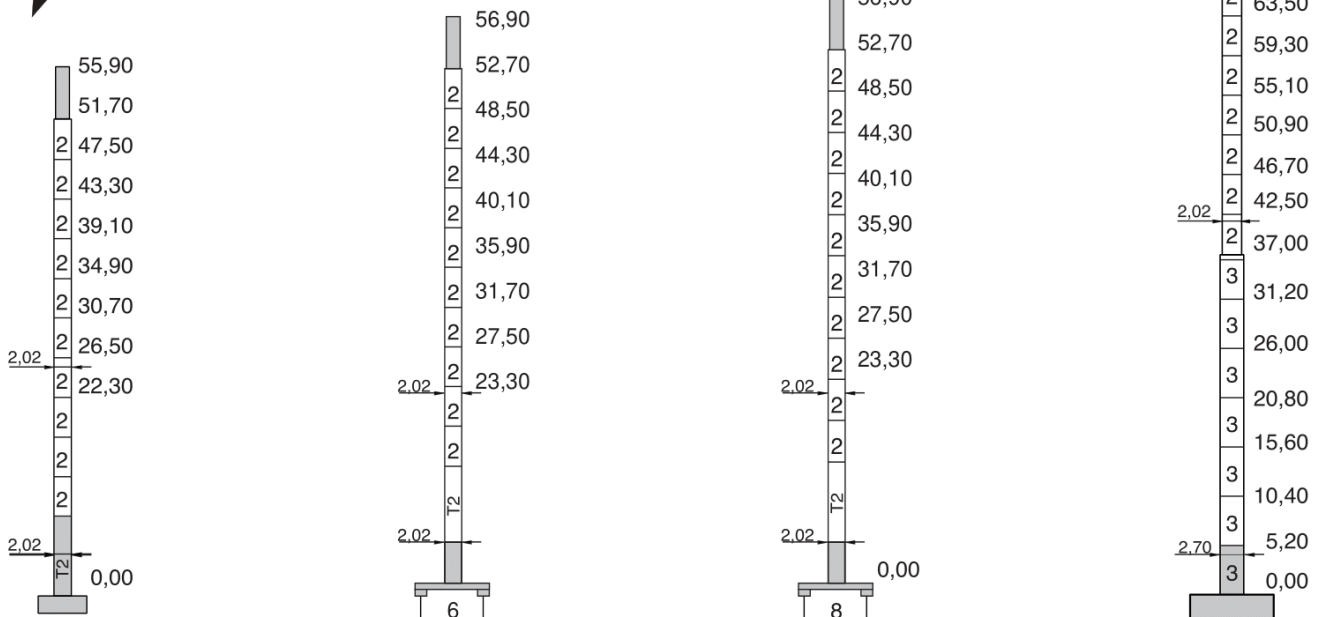TORRI - MASTS






ARGANI DI SOLLEVAMENTO - HOISTING WINCHES

	Hp	m/1'	Kg	Kg	Hp	m/1'	Kg	Kg
	60	120/60	800	1600	75	120/60	1000	2000
		100/50	2400	6000		100/50	3000	6000
		48/24	6000	12000		48/24	6000	12000
		26/13	6000	12000		26/13	6000	12000
		7/3,5	6000	12000		7/3,5	6000	12000


SENZA CARICO LA VELOCITÀ DI SOLLEVAMENTO AUMENTA DEL 20%

HOISTING SPEED INCREASE MORE THAN 20% WITHOUT LOAD

380/440V	ARGANO	POTENZA MAX	GRUPPO GEN.
50/60 HZ	WINCH	MAIN SUPPLY	GENER.
	60 HP	85 KVA	110 KVA
	75 HP	100 KVA	130 KVA

	5,5 KW	10/25/50 m/1'	R56
	3x65 Nm	0-0,8 rpm m/1'	SPR

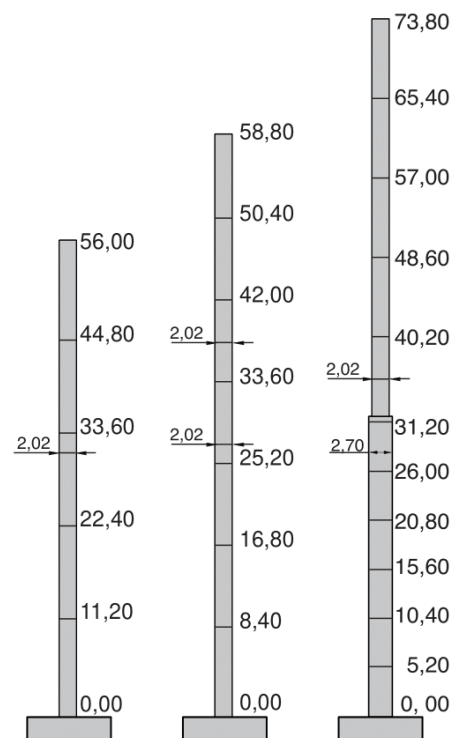VERSIONE CON TORRE MONOLITICA
MONOLITIC TOWER VERSION




2 — 2,02 x 2,02 mt
3 — 2,70 x 2,70 mt

заказать:

+7 (495) 925-97-64



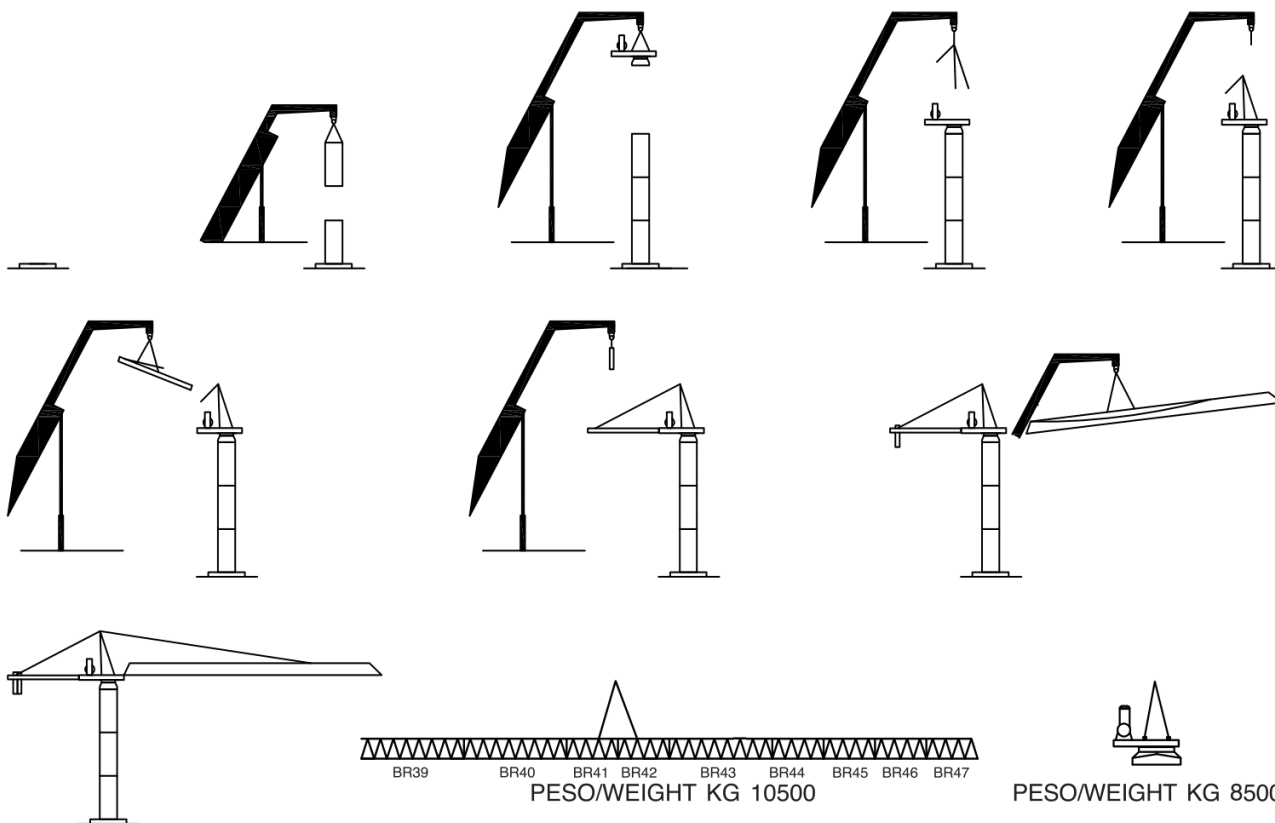MONTAGGIO - ASSEMBLING



DIMENSIONE TORRE (mt) / MAST DIMENSION					
ALTEZZA LIBERA HEIGHT (mt)	2,02 x 2,02 (mt)		2,50 x 2,50 (mt)	TELAIO INTERNO	TELAIO RACCORDO
	4,20	8,40	5,20		
34,90	5	1		1	
39,10	6	1		1	
43,30	7	1		1	
47,50	8	1		1	
51,70	9	1		1	
55,90	10	1		1	
57,30	6		5	1	1
62,50	6		6	1	1
66,70	7		6	1	1
71,90	7		7	1	1
76,10	8		7	1	1

заказать:

+7 (495) 925-97-64